


M2WFR-TK fréza s rozdílným úhlem šroubovice

úhel šroubovice **35°** a **38°**

*jemné dokončovací operace - hlazení - hrubování

*60% větší posuv *zvýšená životnost

*frézování bez vibrací *výborný povrch

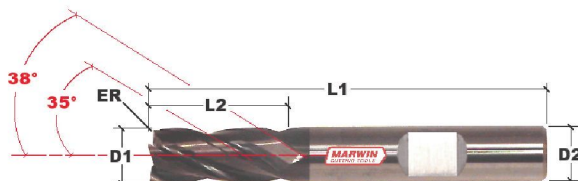


čtyřbřitá s rádiusem TiALN						
DIN 6535 Form HB	D1	L2	L1	D2 h6	ER	CZK
Kód	mm	mm	mm	mm		
7123.040.025	4	11	57	6	0,25	689
7123.040.050	4	11	57	6	0,50	689
7123.040.100	4	11	57	6	1,00	689
7123.050.050	5	13	57	6	0,50	689
7123.050.100	5	13	57	6	1,00	689
7123.050.150	5	13	57	6	1,50	689
7123.060.050	6	13	57	6	0,50	689
7123.060.100	6	13	57	6	1,00	689
7123.060.150	6	13	57	6	1,50	689
7123.060.200	6	13	57	6	2,00	689
7123.080.050	8	19	63	8	0,50	943
7123.080.100	8	19	63	8	1,00	943
7123.080.150	8	19	63	8	1,50	943
7123.080.200	8	19	63	8	2,00	943
7123.100.050	10	22	72	10	0,50	1379
7123.100.100	10	22	72	10	1,00	1379
7123.100.150	10	22	72	10	1,50	1379
7123.100.200	10	22	72	10	2,00	1379
7123.120.050	12	26	83	12	0,50	1741
7123.120.100	12	26	83	12	1,00	1741
7123.120.150	12	26	83	12	1,50	1741
7123.120.200	12	26	83	12	2,00	1741
7123.140.100	14	26	83	14	1,00	2322
7123.140.200	14	26	83	14	2,00	2322
7123.160.100	16	32	83	16	1,00	3047
7123.160.150	16	32	83	16	1,50	3047
7123.160.200	16	32	83	16	2,00	3047
7123.160.250	16	32	83	16	2,50	3047
7123.180.150	18	32	83	18	1,50	4208
7123.180.250	18	32	83	18	2,50	4208
7123.200.100	20	38	83	20	1,00	4644
7123.200.150	20	38	83	20	1,50	4644
7123.200.200	20	38	83	20	2,00	4644
7123.200.250	20	38	83	20	2,50	4644
7123.200.300	20	38	83	20	3,00	4644
7123.200.400	20	38	83	20	4,00	4644
7123.200.500	20	38	83	20	5,00	4644



TK HSS Fréza EPS 4

- * 4-břítá
- * speciální geometrie k frézování drážek a frézování stran
- * 1,5xD zvětšená hloubka drážky pro optimální odvádění třísek
- * zesílené jádro frézy pro nejvyšší stabilitu
- * větší úhel šroubovice napomáhá k jemnému řezu a kvalitnímu povrchu
- * vhodné současně k hrubování i k dokončovacím frézování
- * s ochranou fazetkou
- * provedení stopky DIN6535 HA nebo HB

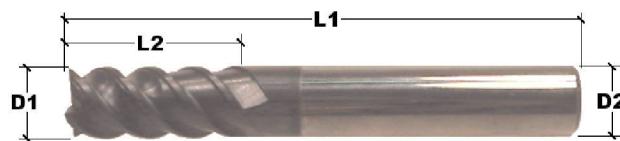

čtyřbřítá						
DIN 6535 Form HA	DIN 6535 Form HB	D1	L2	L1	D2 h6	CZK
Kód	Kód	mm	mm	mm	mm	
7025.040	7026.040	4	11	57	6	685
7025.050	7026.050	5	13	57	6	636
7025.060	7026.060	6	13	57	6	719
7025.080	7026.080	8	19	63	8	826
7025.100	7026.100	10	22	72	10	1415
7025.120	7026.120	12	26	83	12	1922
7025.140	7026.140	14	26	83	12	2724
7025.160	7026.160	16	32	92	16	3690
7025.180	7026.180	18	32	92	18	4112
7025.200	7026.200	20	38	104	20	5313




M2WF-TK fréza s rozdílným úhlem šroubovice úhel šroubovice 35° a 38°

*jemné dokončovací operace - dokončovací operace - hrubování


*o 60% větší posuv *zvýšená životnost

*frézování bez vibrací *výborný povrch

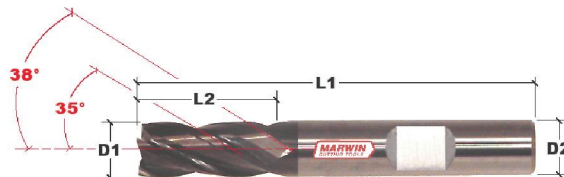

čtyřbřitá krátká TiALN					
DIN 6535 Form HB	D1	L2	L1	D2 h6	CZK
	mm	mm	mm	mm	
Kód					
7020.040	4	8	54	6	539
7020.050	5	9	54	6	539
7020.060	6	10	54	6	539
7020.070	7	12	58	8	699
7020.080	8	12	58	8	699
7020.090	9	14	66	10	980
7020.100	10	14	66	10	980
7020.110	11	16	73	12	1272
7020.120	12	16	73	12	1272
7020.140	14	18	75	14	1587
7020.160	16	22	82	16	2059
7020.180	18	24	84	18	3049
7020.200	20	26	92	20	3172
7020.250	25	32	92	25	7201

čtyřbřitá dlouhá TiALN					
DIN 6535 Form HB	D1	L2	L1	D2 h6	CZK
	mm	mm	mm	mm	
Kód					
7021.040	4	11	57	6	604
7021.050	5	13	57	6	604
7021.060	6	13	57	6	604
7021.070	7	19	63	8	827
7021.080	8	19	63	8	821
7021.090	9	22	72	10	1210
7021.100	10	22	72	10	1204
7021.110	11	26	83	12	1532
7021.120	12	26	83	12	1520
7021.140	14	26	83	14	2038
7021.160	16	32	92	16	2660
7021.180	18	32	92	18	3677
7021.200	20	38	104	20	4054
7021.250	25	38	104	25	7967

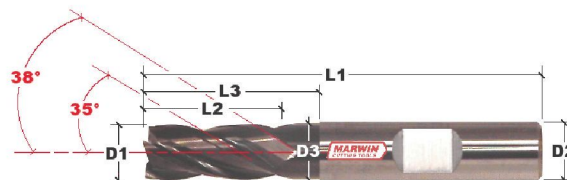

čtyřbřitá dlouhá odsazená TiALN							
DIN 6535 Form HB	D1	L2	L3	L1	D3	D2 h6	CZK
	mm	mm	mm	mm	mm	mm	
Kód							
7022.040	4	11	21	57	3,6	6	689
7022.050	5	13	21	57	4,6	6	689
7022.060	6	13	21	57	5,5	6	689
7022.070	7	19	27	63	6,5	8	913
7022.080	8	19	27	63	7,5	8	913
7022.090	9	22	32	72	8,5	10	1290
7022.100	10	22	32	72	9,5	10	1290
7022.110	11	26	38	83	10,5	12	1609
7022.120	12	26	38	83	11,5	12	1609
7022.130	13	26	42	83	12,5	14	2114
7022.140	14	26	42	83	13,5	14	2114
7022.160	16	32	42	92	15,5	16	2752
7022.180	18	32	50	92	17,5	18	3769
7022.200	20	38	54	104	19,5	20	4137

